



WARRANTY INFORMATION

We sincerely thank you for your purchase and wish you years of pleasure using it!

Tele Vue Warranty Summary

Eyepieces, Barlows, Powermates, & Paracorr have a “Lifetime Limited” warranty, telescopes & accessories are warranted for 5 years. Electronic parts are warranted for 1 year. Warranty is against defects in material or workmanship. No other warranty is expressed or implied. No returns without prior authorization. Please keep your receipts in case you need warranty service.

Lifetime Limited Warranty details online: <http://bit.ly/TVOPTLIFE>

5-Year/1-Year Warranty details online: <http://bit.ly/TVOPTLIMITED>

Subscribe to our Blog for the latest Tele Vue news: <https://bit.ly/TeleVueBlog>

Keep For Your Records

Dealer: _____ City/State/Country: _____

Date (day/month/year): ____ / ____ / ____ Item Code / Description _____

32 Elkay Dr., Chester, New York 10918 (845) 469-4551. televue.com



@televueoptics

EYEPIECE CADDY SET INSTRUCTIONS


PARTS LIST

2" Eyepiece Bracket with 1 1/4" plastic inserts
1 1/4" Eyepiece Bracket
(4) Knurled Knobs

INTRODUCTION

Thank you for purchasing the Eyepiece Caddy Set. This versatile accessory attaches to the yoke arms of your Tele Vue mount and places five eyepieces conveniently at your fingertips. Available clearance holes at the ends of each Caddy can be used as mounting points for your DSC / Computer.

The Caddy Set is precision machined aluminum, and powder-coated for lifetime durability. You may wish to remove them and pack separately when carrying a mount head in luggage.

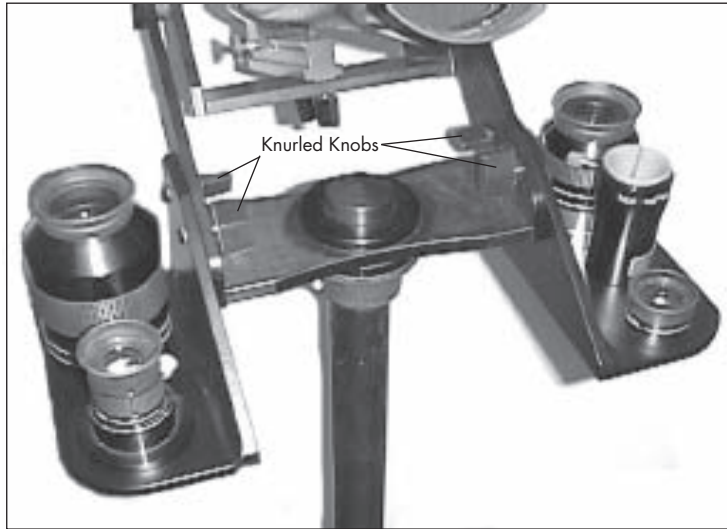


INSTALLATION

The most current yoke and cradle heads have the attachment holes already drilled into the arms. If your mount arms are not predrilled, you can use a drill press and the enclosed templates to make the holes yourself.

Attach each Caddy bracket by passing the screws through the clearance holes in the yoke arms and tightening the thumb knobs.

The angled edge will match the arms, so that when viewing from the telescope eyepiece position, the (3) 1 1/4" holes will be on the left side, while the (2) 2" holes with removable 1 1/4" plastic plugs will be to your right.

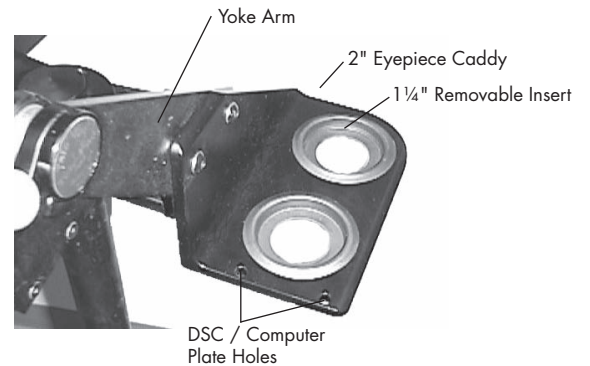


USE

You can place up to (5) 1 1/4" eyepieces in the Caddy Set, or by removing the plastic inserts, use (3) 1 1/4" and (2) 2" eyepieces. To remove the 1 1/4" inserts, push up from the bottom. To reinstall the 1 1/4" inserts, push them in from the top by running your thumbs around the outer lip.

If you have dual barrel eyepieces you can use either 1 1/4" or 2" holes, but the outside lock screw in the 2" eyepiece barrel must be removed.


Of course, your Barlow or Powermate units, or 2" to 1 1/4" adapters can also be placed in the Caddy Set.

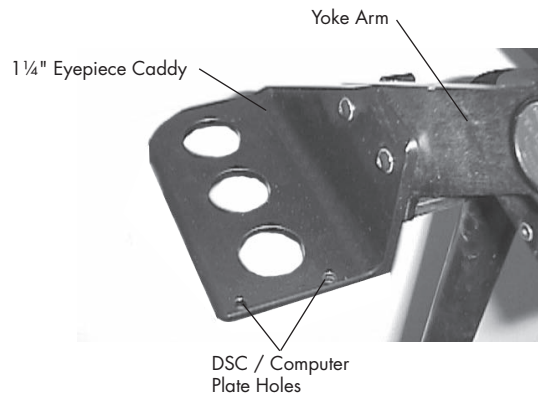

Attaching DSC / Computer Mounting Bracket

The ends of the Eyepiece Caddy make a good mounting location if your DSC / Computer comes with a mounting plate. There are two 5/32" clearance holes available there on each Caddy. Typically the DSC / Computer is attached by Velcro to the plate. When using shorter scopes like our Tele Vue-76 or Tele Vue-85, make sure you leave enough finger room between the DSC / Computer / plate setup and the focuser knobs on the telescope.

Typical Velcro location on back of DSC / Computer



Typical DSC / Computer mounting plate on right Caddy. Note focuser knob clearance with plate (arrow).



LEFT YOKE ARM TEMPLATE

EYEPIECE CADDY MOUNTING HOLE POSITIONS IN YOKE ARMS OF: PANORAMIC/GIBRALTAR/UP-SWING/TELEPOD HEADS

NOTE: Tele Vue strongly recommends using a drill press, not a hand drill for making these holes.


1) Transfer the measurements from the drawing to your Yoke arm.

Or, cut out the template and tape it to the outside of the Yoke arm, with the bottom and back surfaces aligned with the corresponding surfaces of your yoke arms.

2) Center punch the holes to be drilled.

3) Secure the mount head so it won't move while drilling.

4) Drill the holes with a 17/64 diameter drill.

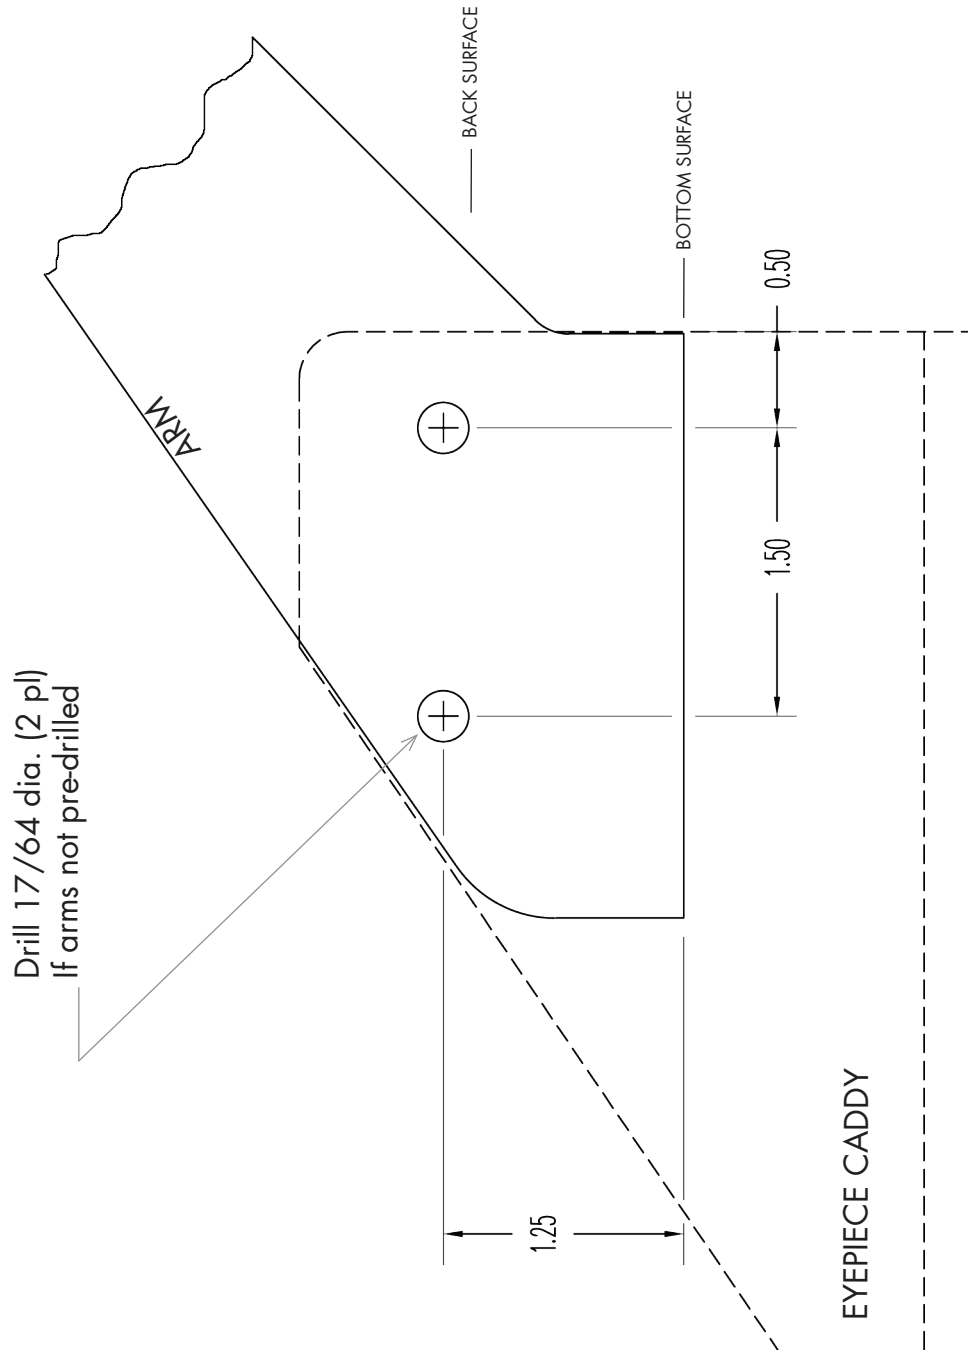

RIGHT YOKE ARM TEMPLATE

EYEPIECE CADDY MOUNTING HOLE POSITIONS IN YOKE ARMS OF: PANORAMIC/GIBRALTAR/UP-SWING/TELEPOD HEADS

NOTE: Tele Vue strongly recommends using a drill press, not a hand drill for making these holes.

1) Transfer the measurements from the drawing to your Yoke arm.

Or, cut out the template and tape it to the outside of the Yoke arm, with the bottom and back surfaces aligned with the corresponding surfaces of your yoke arms.

2) Center punch the holes to be drilled.

3) Secure the mount head so it won't move while drilling.

4) Drill the holes with a 17/64 diameter drill.

