

CI-700/CGE/G-11 Mount Adapter Instructions

PARTS LIST

- (1) Dove tail adapter plate
- (6) 1/4-20 socket head screws
- (1) 3/16" Allen wrench

INTRODUCTION

The CI-700/CGE/G-11 Mount Adapter allows direct mounting of any Tele Vue telescope to Celestron's CI-700, CGE and Losmandy's G-11 German Equatorial mount. The adapter can be used for single scope applications or with two Tele Vue scopes in tandem.

INSTALLATION

For single scope use:


- 1) Use two (2) socket screws in the "B" clearance holes to attach your telescope to the adapter plate.
- 2) Install one (1) socket screw into the forward "A" threaded hole to act as a safety stop.
- 3) Slide the dovetail adapter plate with telescope attached, into the mating dovetail on the mount head.
- 4) Tighten the lock screw on the mount head to lock your telescope in place
- 5) Install another socket screw into the rear "A" threaded hole as a second safety stop.

For dual scope photographic use:

- 1) Use two (2) socket screws in the "C" clearance holes to attach one telescope to the adapter plate.
- 2) Use two (2) socket screws in the "D" clearance holes to attach the other telescope to the adapter plate.
- 3) Install one (1) socket screw into either "A" threaded hole to act as a safety stop.
- 4) Slide the dovetail adapter plate with telescopes attached, into the mating dovetail on the mount head.
- 5) Tighten the lock screw on the mount head to lock your telescope in place
- 6) Install another socket screw into the rear "A" threaded hole as a second safety stop.

For mounting the MRS-5000 Tube Ring Set

- 1) Remove the 1/4-20 stud from both tube rings, but leave the smaller guide studs in the rings
- 2) Place the adapter plate onto the Tube Ring Set such that its guide studs nest in the corresponding holes in the plate.
- 3) Use two (2) socket screws in the "E" clearance holes to attach the Tube Ring Set to the adapter plate
- 4) Install one (1) socket screw into either "A" threaded hole to act as a safety stop.
- 5) Slide the dovetail adapter plate with telescopes attached, into the mating dovetail on the mount head.
- 6) Tighten the lock screw on the mount head to lock your telescope in place
- 7) Install another socket screw into the rear "A" threaded hole as a second safety stop.

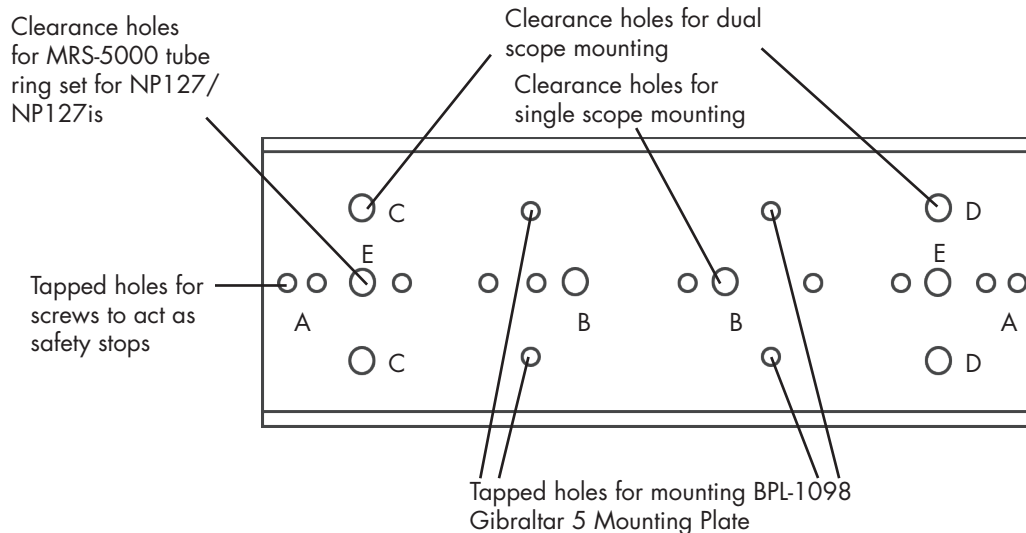

rev:20110519