


Tele Vue-NP101is Component Recommendations


Component Recommendations for Top Performance at Prime Focus								
	Recommended Maximum CCD/film diagonal	Speed	Focal Length	Field of View	Camera Connector	Additional Spacer to match 55mm reference	Accessory Lens	Spacer length from focuser drawtube
1	30mm (APS size DSLR)	f/5.4	540mm	3.2°	T-Ring (TRG-1072) or Wide T-Ring (CWT-2070)	X	X	2.375" (2) TLD-1000 (1) TLB-0375
2	30mm (APS size DSLR)	f/4.3	435mm	4.0°	T-Ring (TRG-1072) or Wide T-Ring (CWT-2070)	X	0.8x Reducer (NPR-1073)	0.5" TLC-0500
3	40mm (SBIG STL series cameras)	f/5.4	540mm	4.2°	SBIG STL Series (STL-1071)	1.0" TLD-1000	Large Field Corrector (LCL-1069)	1.375" (1) TLD-1000 (1) TLB-0375
Not Shown	Apogee Cameras with D2 or D7 Lids	f/5.4	540mm	Will vary with camera	AD2-1110 AD7-1111	1.375" (1) TLD-1000 (1) TLB-0375	Large Field Corrector (LCL-1069)	1.375" (1) TLD-1000 (1) TLB-0375
4	40mm (35mm SLR/DSLR)	f/5.4	540mm	4.2°	T-Ring (TRG-1072) or Wide T-Ring (CWT-2070)	0.25" TLA-0250	Large Field Corrector (LCL-1069)	1.375" (1) TLD-1000 (1) TLB-0375

Accessories Key


- A. Imaging System Adapter (Supplied Standard)
- E. LCL-1069 Large Field Corrector for optimized edge performance on NP101is and NP127is (for big chip sizes).
- F. TLA-0250 0.25" long threaded extension
- G. STL-1071 SBIG STL series adapter
- H. TRG-1072 Standard T-Ring adapter
- I. CWT-1070/CWT-2070 Canon Wide T-Adapter
- J. TLB-0375 0.375" long threaded extension
- K. TLC-0500 0.500" long threaded extension
- L. TLD-1000 1.000" long threaded extension
- M. NPR-1073 0.8X Reducer

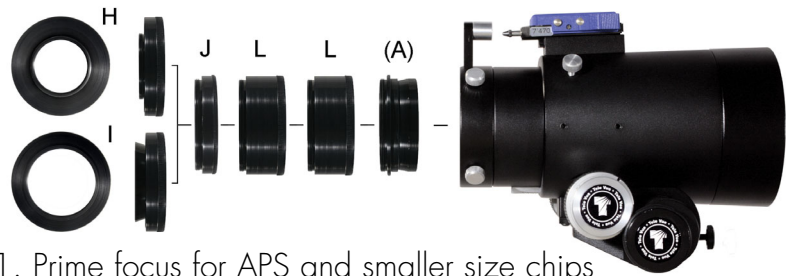


1. Prime focus for APS and smaller size chips

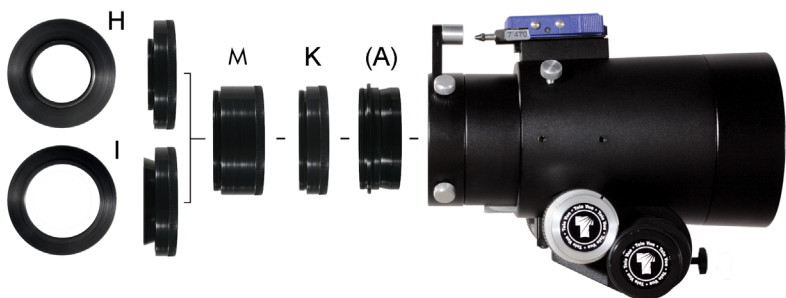

2. Prime focus with 0.8X Reducer for APS and smaller size chips

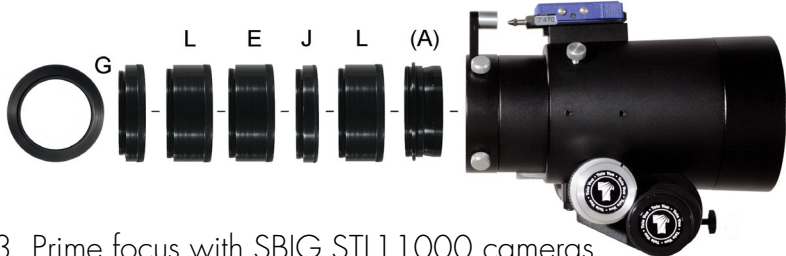

3. Prime focus with SBIG STL1 1000 cameras

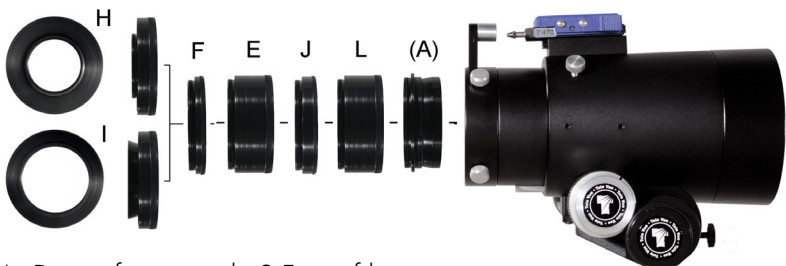

4. Prime focus with 35mm film camera

